


# AD-ETH100

100 Mbps Ethernet interface

- 10/100 Mbps transmission rate
- RJ45 connector for UTP/STP
- Power supply from internal source
- Line status and communication activity indication by LEDs
- Self-stacking connection to the AD-CPU unit, DIN rail mounting

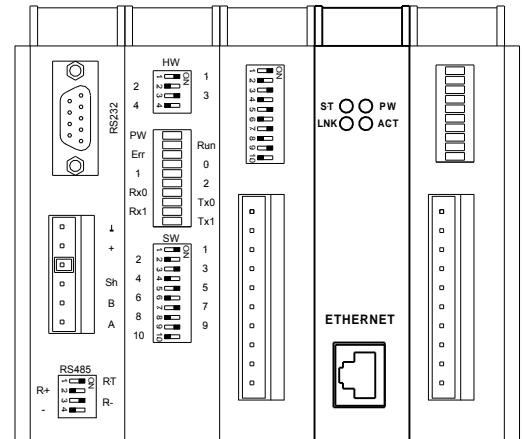

## TECHNICAL DATA

Connector	RJ45, according to IEEE802.3
Module position in system	No limitation
Max. number of modules	4
<b>Power supply</b>	
Max. internal source consumption (5 V DC)	280 mA
<b>Others</b>	
Mounting	35 mm DIN rail
Operating temperature	0 °C to 70 °C
Max. ambient humidity	< 95 % non-condensing
Weight	200 g
Dimensions (w × h × d)	(25 × 104 × 96) mm

Note: This module is supported by the NOS operating system in connection with AD-CPU167 or AD-CPUW2 main unit.

## ORDERING INFORMATION

<b>AD-ETH100</b>	10/100 Mbps Ethernet interface module
------------------	---------------------------------------

Further information can be found in operational manual ([adis\\_g\\_en\\_xxx.pdf](#)). Documentation can be downloaded from [www.amit.cz](http://www.amit.cz) web site.